




WITTUR® ROLLER GUIDES



WRG80

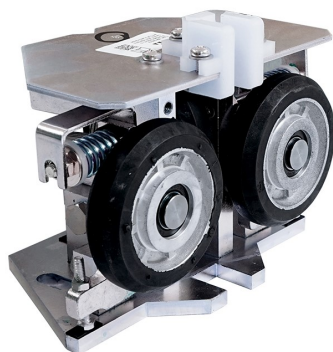

WRG100

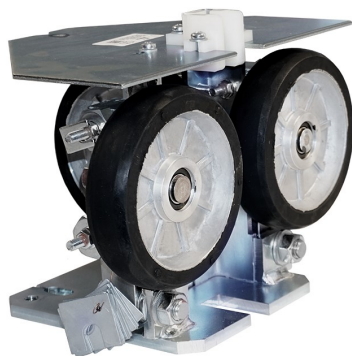

WRG150



WITTUR

Product Description

Wittur® Roller Guides can be placed on both cars and counterweight frames for medium and high-speed elevators (up to 10,0 m/s).

Depending on the model, they are suitable for guide rails with head thickness from 9 to 32 mm.

- All rollers are separately spring-loaded, ensuring maximum ride comfort
- Uniform design concept—optimized for its field of application
- Suitable for T-profile guide rails only
- Experienced technology for an absolute smooth ride
- Roller guides are pre-assembled and adjusted for installation
- Fitting kit for the exact installation of the roller guides is included

Roller Guides		
Part No.	Wheel Diameter	Rail Face
WRG80-16	3" · 80mm	5/8" · 16mm
WRG100-16	4" · 100mm	5/8" · 16mm
WRG125-16	5" · 125mm	5/8" · 16mm
WRG150-16	6" · 150mm	5/8" · 16mm
WRG150-19	6" · 150mm	3/4" · 19mm
WRG200-16-CAR	8" · 200mm	5/8" · 16mm
WRG200-19-CAR	8" · 200mm	3/4" · 19mm
WRG300-19	12" · 300mm	3/4" · 19mm

Replacement Wheels	
Part No.	Diameter
WW80	3" · 80mm
WW100	4" · 100mm
WW125	5" · 125mm
WW150	6" · 150mm
WW200	8" · 200mm
WW300	12" · 300mm

SELECTION TABLES

Speed	Up to 350 FPM (1.75 m/s)			
Guide Rail Size	Car - 15 lbs/ft	CWT - 8 lbs/ft	Car - 18.5 lbs/ft	CWT - 15 lbs/ft
Rail ISO Code	T127-2	T89	T140-1	T127-2
Model	WRG100-16	WRG80-16	WRG150-19	WRG80-16
Wittur P/N	604124G16	86800G16	581271G19	86800G16

Speed	400-500 FPM (2.0 - 2.5 m/s)			
Guide Rail Size	Car - 15 lbs/ft	CWT - 8 lbs/ft	Car - 18.5 lbs/ft	CWT - 15 lbs/ft
Rail ISO Code	T127-2	T89	T140-1	T127-2
Model	WRG125-16	WRG80-16	WRG150-19	WRG80-16
Wittur P/N	375861G16	86800G16	581271G19	86800G16

Speed	600-800 FPM (3.0 - 4.0 m/s)			
Guide Rail	Car - 15 lbs/ft	CWT - 8 lbs/ft	Car - 18.5 lbs/ft	CWT - 15 lbs/ft
Rail ISO Code	T127-2	T89	T140-1	T127-2
Model	WRG150-16	WRG100-16	WRG150-19	WRG100-16
Wittur P/N	581271G16L	604124G16	581271G19	604124G16

Speed	900-1000 FPM (4.5-5.0 m/s)			
Guide Rail Size	Car - 15 lbs/ft	CWT - 8 lbs/ft	Car - 18.5 lbs/ft	CWT - 15 lbs/ft
Rail ISO Code	T127-2	T89	T140-1	T127-2
Model	WRG200-16-CAR	WRG125-16	WRG200-19-CAR	WRG125-16
Wittur P/N	169850G16L	375861G16	169850G19	375861G16

Speed	1200-1400 FPM (6.0 - 7.0 m/s)			
Guide Rail	Car - 15 lbs/ft	CWT - 8 lbs/ft	Car - 18.5 lbs/ft	CWT - 15 lbs/ft
Rail ISO Code	T127-2	T89	T140-1	T127-2
Model	WRG300-16	WRG125-16	WRG300-19	WRG125-16
Wittur P/N	390518G16	375861G16	390518G19	375861G16

Speed	Greater than 1400 FPM (7.0 m/s)			
Guide Rail Size	Car - 18.5 lbs/ft	CWT - 15 lbs/ft	Car 22 lbs/ft	CWT - 18.5 lbs/ft
Rail ISO Code	T140-1	T127-2	T140-2	T140-1
Model	WRG300-19	WRG200-16-CWT	WRG300-32	WRG200-19-CWT
Wittur P/N	390518G19	394539G16L	390518G32	394539G19